


Capacitor, film, 4700 pF, +/-5% Tol, -55/+105C, General Purpose, 2500V@85C, Lead Spacing=22.5 mm



## **Dimensions (mm)**

ID	Dimension	Tolerance	Manufacturer:	KEMET
L	26	max	Brand:	Rifa
н	14.5	max	Capacitance:	4700 pF
т	6.5	max	Temperature Range:	-55/+105C
S	22.5	+/-0.4	Rated Temperature:	85C
LL	6	nom	Voltage @ rated temp:	2500V
F	0.8	nom	Voltage AC:	900VAC
			Tolerance:	+/-5%
			Body Type:	Radial Box

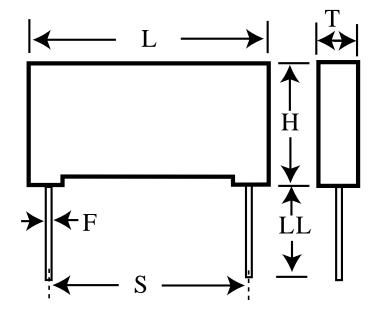

KEMET	
Rifa	
4700 pF	
-55/+105C	
85C	
2500V	
900VAC	
+/-5%	
Radial Box	
Double Metallized	
General Purpose	
Pulse	
0.03%	
0.04%	
0.15%	
100 GOhm	
6 nH	
1800v/us	
IEC 60384-17, Gr. 1.1; Rthha [85C/2	
= 60 C/W series(PHE450)	
Bulk	
Tray	
234	



© 2006-2012 IntelliData.net

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.